


acro pure

by miller paint co

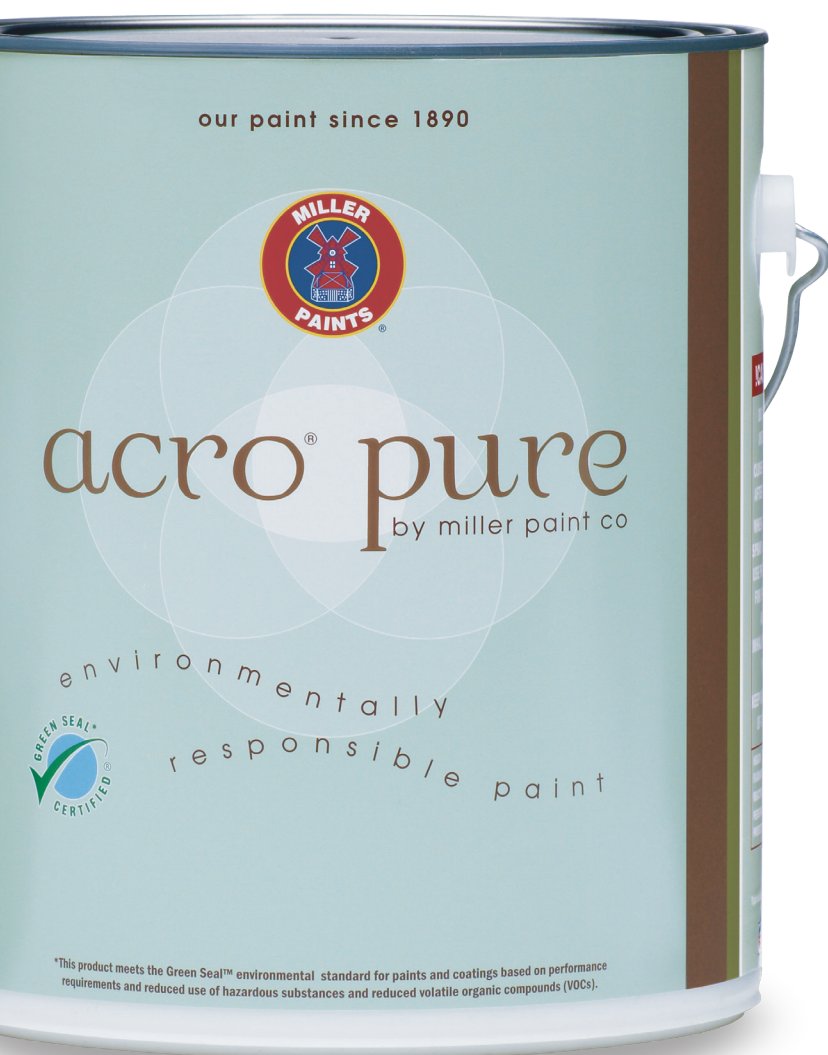

“Pure” is defined as being ‘free of anything inappropriate, extraneous, contaminating, polluting, or impure.’ Acro pure is just that. No chemical solvents or other harmful additives are used during our manufacturing process, resulting in a minimal number of VOCs (Volatile Organic Compounds). Combine these features with acro pure’s increased durability and coverage and you have a core component in the sustainable building process.

- Incredibly low odor
 - Environmentally responsible
 - Less than 6 g/L VOC in all sheens
 - Mold resistant/antimicrobial protection
 - Green Seal™-Certified (GS-11, 2008 revision)
-



This product meets the Green Seal™ environmental standard for paints and coatings based on performance requirements and reduced use of hazardous substances and reduced volatile organic compounds (VOCs).

SHEENS

semigloss

This high-sheen product is very washable and perfect for areas that are more susceptible to dirt, grease and moisture. Ideal for high-traffic areas or the most used rooms in a home, such as the den, bathroom or kitchen.

satin

This finish will minimize dirt pick-up and is washable. Ideal for rooms that have an average amount of use and where a deep, rich look with some sheen and washability are desired.

eggshell

Ideal for projects where a deep, rich look is desired yet only a minimal sheen is needed. It is designed for areas that require moderate washability.

flat

A flat finish will minimize visibility of surface imperfections due to lack of light refraction. It is less washable and designed for applications where no sheen is desired, such as ceilings, formal living and dining rooms or uneven surfaces.

About Green Seal™

Green Seal is an independent, non-profit organization, which sets standards for environmentally preferable products. Green Seal conducts product evaluations and certifies products that meet or exceed those standards. For more information on Green Seal, please go to www.greenseal.org.

SPECIFICATIONS

	flat	eggshell	satin	semigloss
volume solids	31.00%	34.50%	32.49%	33.85%
viscosity	98-103 KU	98-103 KU	98-103 KU	98-103 KU
weight/gallon	11.5#	11.12#	10.89#	10.31#
gloss@60°	0-5%	5-10%	10-20%	45-55%

voc: 6 g/L < water

coverage: Approximately 350-400 square feet per gallon. Two coats recommended for even coverage. Coverage depends on porosity and profile of the surface.

dry time: One hour to touch and three hours to recoat at 70° F and 50% relative humidity.

Specification figures should be taken as accurate for products being produced at the time of publication in untinted white bases only. Formulation improvements may be made from time to time that may affect these figures to some degree. Manufacturing tolerances of +/-2% are considered acceptable. Whenever a change is made that the Manufacturer considers substantial, the Specification will be revised.

millerpaint.com

Miller, acro, and miller paints are registered trademarks of miller paint co., inc. portland, or. 11/09 15k EXP225

