




# EVOLUTION®

THE ART OF QUALITY AND COLOR

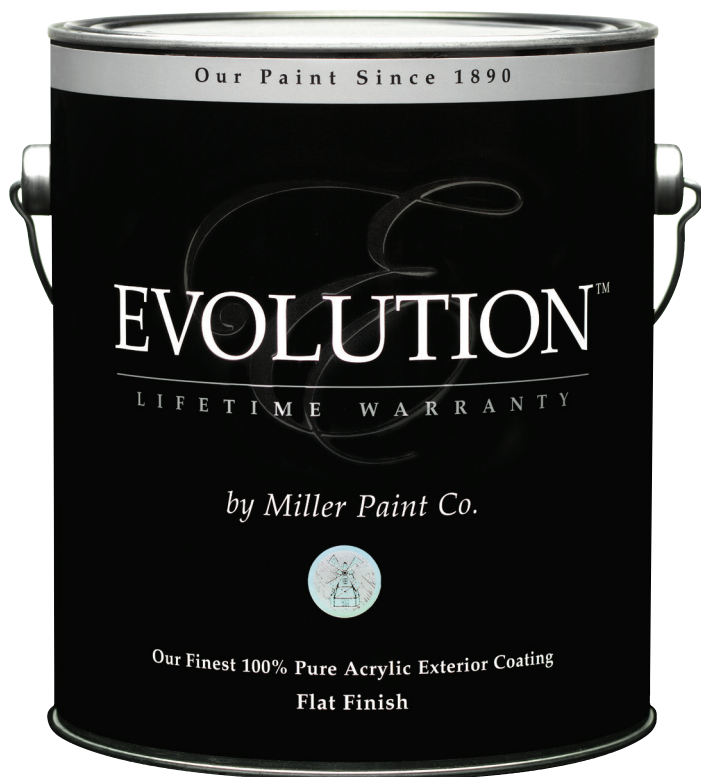

Evolution® is our most technologically advanced coating. Formulated with an advanced 100% pure acrylic co-polymer resin for prolonged adhesion, this high solids coating is like nothing else we make. Evolution can be used on properly prepared vertical wood, composite, metal, concrete, stucco, and block. Evolution can be applied heavier than standard exterior paints for better coverage in one application. Evolution by Miller Paint saves labor, resources and is covered by our exclusive lifetime warranty.

- Lifetime warranty
- Advanced 100% acrylic system
- Self priming
- Mildew, mold, & algae resistant
- Excellent flexibility
- Bridges minor cracks
- Easy to apply
- Easy cleanup

## FLAT

A flat finish will minimize visibility of surface imperfections due to lack of light refraction. It is best used for rough surfaces or surfaces that are regularly repainted or touched up.

## VELVET

Ideal for projects where a deep, rich look is desired yet only a minimal sheen is needed. This finish has a minimal sheen that is mostly seen at an angle. It reduces dirt pick-up and provides some washability. Ideal for full body exterior work where some sheen is desired. Best used when the surface is free of major imperfections.

## SEMIGLOSS

This finish will minimize dirt pick-up and is washable. Ideal for full body exterior work where some sheen is desired. Best used when the surface is free of major imperfections. Use in applications like exterior body, sidings (wood or metal), exterior rough or smooth trim.



# EVOLUTION®

THE ART OF QUALITY AND COLOR



## Specifications Evolution Exterior Wall Finish

	FLAT	VELVET	SATIN
VOLUME SOLIDS	42.8%	43.4%	40.4%
VISCOSITY	100-105 KU	100-105 KU	100-105 KU
WEIGHT PER GALLON	12.08 (LB)	11.54 (LB)	11.02 (LB)
GLOSS	2.5-3.5% @ 60°	3.0-5.0% @ 60°	11.0-15.0% @ 60°
V.O.C. (MINUS WATER)	38.0 G/L	47.0 G/L	49.0 G/L

**COVERAGE:** Approximately 250-450 square feet per gallon. Two coats recommended for even coverage. Coverage depends on porosity and profile of the surface. Properly prepared surfaces provide the best coverage.

**DRY TIME:** Thirty minutes to touch and two hours to recoat @ 70°F and 50% relative humidity.

## ABOUT MILLER PAINT

Established in 1890, Miller Paint is an employee owned company with a proud Northwest tradition of creating products made for our unique Northwest climate. From our humble beginnings as a family-run company, to a company with over 300 employees and over 50 locations, Miller Paint has always been there for the professional and homeowner alike.

For a location near you, go to [www.millerpaint.com](http://www.millerpaint.com)

Specification figures should be taken as accurate for products being produced at the time of publication in untinted white bases only. Formulation improvements may be made from time to time that may affect these figures to some degree. Manufacturing tolerances of +/-2% are considered acceptable. Whenever a change is made that the Manufacturer considers substantial, the specification will be revised. Miller and Miller Paints are registered trademarks of Miller Paint Co., Inc. Portland, OR. REV 9/16