




ACRI-LITE®

OUR MOST POPULAR EXTERIOR PAINT

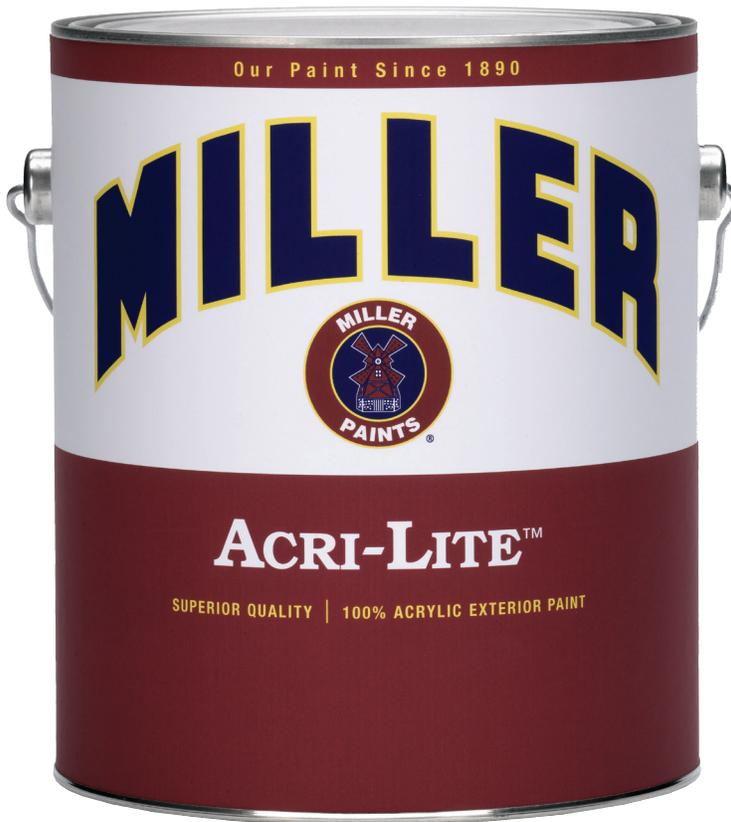

Acri-Lite has been the quality standard for exterior painting in the Northwest for more than 50 years. Made from the highest quality acrylic resin, Acri-Lite is our most popular and widely used exterior paint. 100% acrylic, superb adhesion, washability and coverage make it ideal for showcase buildings or any commercial or residential building where the highest level of quality is desired.

Acri-Lite is also available in “Super,” which is enhanced with more titanium dioxide and resin for increased hide or coverage when painting with white or light colors.

- 100% Acrylic
- Self-priming
- Excellent color retention
- Unlimited color selection
- Water clean up

FLAT

A flat finish will minimize visibility of surface imperfections due to lack of light refraction. It is best used for rough surfaces or surfaces that are regularly repainted or touched up.

VELVET

Ideal for projects where a deep, rich look is desired yet only a minimal sheen is needed, and mostly seen at an angle. It reduces dirt pick-up and provides some washability. Ideal for full body exterior work where some sheen is desired. Best used when the surface is free of major imperfections.

SATIN

This finish will minimize dirt pick-up and is washable. Ideal for full body exterior work where some sheen is desired. Best used when the surface is free of major imperfections. Use in applications like exterior body, sidings (wood or metal), exterior rough or smooth trim.

SEMI GLOSS

This high-sheen product is very washable and perfect for areas that are more susceptible to dirt, grease and moisture. Use in applications like exterior smooth siding, exterior smooth wood trim, and primed metal surfaces.



ACRI-LITE®

OUR MOST POPULAR EXTERIOR PAINT

SPECIFICATIONS FOR ACRI-LITE

	FLAT	VELVET	SATIN	SEMIGLOSS
VOLUME SOLIDS	41.9%	42.5%	39.0%	39.0%
VISCOSITY	100-105 KU	100-105 KU	100-105 KU	100-105 KU
WEIGHT PER GALLON	11.5 (LB)	11.2 (LB)	10.6 (LB)	10.2 (LB)
GLOSS	3-5%@60°	4-6%@60°	10-20%@60°	45-55%@60°
V.O.C. (MINUS WATER)	49.0 G/L	45.5 G/L	47.0 G/L	50.0 G/L

COVERAGE: Approximately 350-475 square feet per gallon. @ 1.5 dry mils. Two coats recommended for even coverage. Coverage depends on porosity and profile of the surface. Properly prepared surfaces provide the best coverage.

DRY TIME: One hour to touch and four hours to recoat @ 70°F and 50% relative humidity.

SPECIFICATIONS FOR SUPER ACRI-LITE

	VELVET	SATIN	SEMIGLOSS
VOLUME SOLIDS	45.0%	42.7%	42.0%
VISCOSITY	100-105 KU	100-105 KU	100-105 KU
WEIGHT PER GALLON	11.9 (LB)	11.0 (LB)	10.6 (LB)
GLOSS	4-6%@60°	10-20%@60°	45-55%@60°
V.O.C. (MINUS WATER)	48.0 G/L	49.0 G/L	50.0 G/L

COVERAGE: Approximately 350-475 square feet per gallon. @ 1.5 dry mils. Two coats recommended for even coverage. Coverage depends on porosity and profile of the surface. Properly prepared surfaces provide the best coverage.

DRY TIME: One hour to touch and four hours to recoat @ 70°F and 50% relative humidity.

ABOUT MILLER PAINT

Established in 1890, Miller Paint is an employee owned company with a proud Northwest tradition of creating products made for our unique Northwest climate. From our humble beginnings as a family-run company, to a company with over 300 employees and over 50 locations, Miller Paint has always been there for the professional and homeowner alike.

For a location near you, go to www.millerpaint.com

Specification figures should be taken as accurate for products being produced at the time of publication in untinted white bases only. Formulation improvements may be made from time to time that may affect these figures to some degree. Manufacturing tolerances of +/- 2% are considered acceptable. Whenever a change is made that the Manufacturer considers substantial, the specification will be revised. Miller and Miller Paints are registered trademarks of Miller Paint Co., Inc. Portland, OR.REV 9/16

