




# Evolution® Exterior

OUR FINEST PAINT

With over 130 years of quality paint-making, Evolution® is our most technologically-advanced coating. Formulated with a 100% pure acrylic co-polymer resin system developed for prolonged adhesion, this high-solids exterior coating provides superior coverage and long-lasting durability. Born out of our roots in the Pacific Northwest, each gallon of Evolution Exterior paint boasts early moisture resistance and enhanced protection from mold and mildew growth. Evolution's flexible, smooth finish retains color brilliance and resists fade, even on darker colors. Make your home a part of our legacy with Evolution, Our Finest Paint.

## FEATURES + BENEFITS:

- **Advanced 100% Acrylic System**
- **Enhanced UV Protection and Fade Resistance**
- **Early Moisture and Surfactant Resistance**
- **Superior Coverage and Long-Lasting Durability**
- **Excellent Flexibility Minimizes Cracking & Peeling**
- **Reduced Dirt Pick Up**
- **Superior Color Retention**
- **Inhibits Mold & Mildew Growth**
- **Smooth, High Quality Finish**
- **Low Temp Application down to 35° F**
- **Limited Lifetime Warranty**

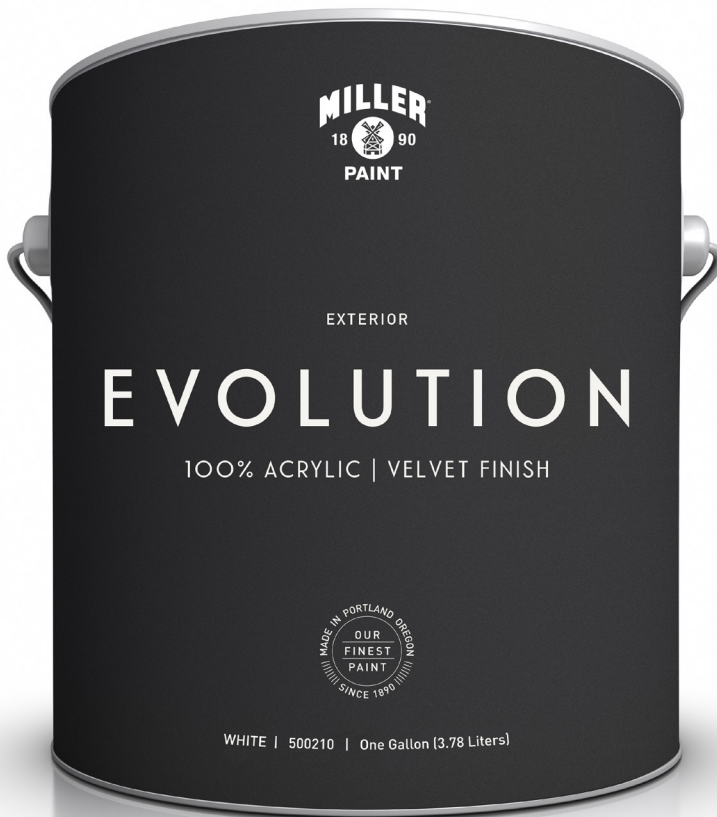

## VELVET

Ideal for projects where a deep, rich look is desired yet only a minimal sheen is needed. This finish has a minimal sheen that is mostly seen at an angle. It reduces dirt pick-up and provides some washability. Ideal for full body exterior work where some sheen is desired. Best used when the surface is free of major imperfections.

## SATIN

This finish will minimize dirt pick-up and is washable. Ideal for full-body exterior work where some sheen is desired. Best used when the surface is free of major imperfections.



# Evolution® Exterior

## OUR FINEST PAINT

### Specifications for Evolution Exterior Wall Finish

	VELVET	SATIN
VOLUME SOLIDS	42.6%	41.4%
VISCOSITY	100-105 KU	100-105 KU
WEIGHT PER GALLON	11.26 (LB)	11 (LB)
GLOSS	2-6% @60° 5-20% @85°	10-20% @60° 30-45% @85°
VOC* (MINUS WATER)	49 G/L	49 G/L

\*MAXIMUM VOC CONTENT FOR THIS PRODUCT AS PER 40 CFR 59.406



**COVERAGE:** Approximately 250 - 500 square feet per gallon. Two coats recommended for even coverage. Coverage depends on porosity and profile of the surface. Properly prepared surfaces provide the best coverage.

**DRY TIME:** Thirty minutes to touch and two hours to recoat @ 70°F and 50% relative humidity.

**For complete preparation and application instructions see Technical Data Sheet on [millerpaint.com](http://millerpaint.com).**

**LIMITED LIFETIME WARRANTY:** If this Miller Paint Evolution Exterior Paint, when applied in accordance with label instructions and technical data sheet, blisters or peels for as long as you own the single-family home to which this paint was applied, then Miller Paint Co., Inc. will either provide an equivalent paint product in an amount sufficient for repair free of charge, or refund the original purchase price, but only upon presentation of original proof of purchase. This warranty, which excludes failure due to deterioration of the underlying surface, structural defects or failure of previous paint, inadequate surface preparation or application of the product, extends only to the owner of the single-family home to which the paint was applied during such owner's occupancy, may not be transferred or assigned, and is your sole and exclusive remedy. THIS WARRANTY DOES NOT INCLUDE LABOR OR THE COST OF LABOR FOR THE APPLICATION OF ANY PRODUCT, AND EXCLUDES ANY INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES. Some states do not allow the exclusion of incidental or consequential damages, so the limitation may not apply to you. This warranty gives you specific legal rights, and you may have other rights, which vary from state to state.

### ABOUT MILLER PAINT

Established in 1890, Miller Paint is an employee-owned company with a proud Northwest tradition of creating products made for our unique Northwest climate. From our humble beginnings as a family-run company, to a company with over 300 employees and over 50 locations, Miller Paint has always been there for the professional and homeowner alike.

For a location near you, go to [www.millerpaint.com](http://www.millerpaint.com)

Specification figures should be taken as accurate for products being produced at the time of publication in untinted white bases only. Formulation improvements may be made from time to time that may affect these figures to some degree. Manufacturing tolerances of +/-2% are considered acceptable. Whenever a change is made that the Manufacturer considers substantial, the specification will be revised. Miller and Miller Paints are registered trademarks of Miller Paint Co., Inc. Portland, OR. REV 9/16