




PRO-JEX ZERO

Interior Latex Paint

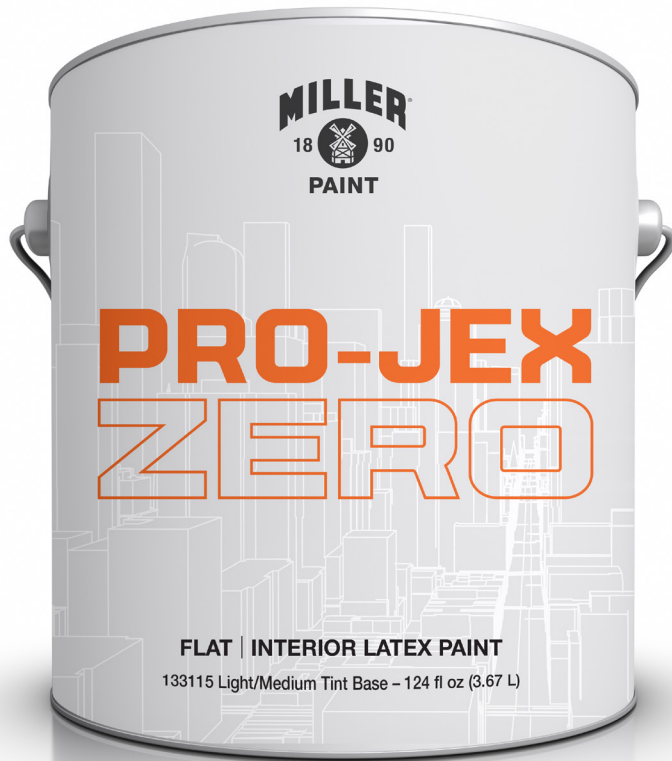

PRO-JEX ZERO is a line of professional quality latex paints formulated for dependable performance. With ultra-low VOCs*, PRO-JEX ZERO is the pro's go-to for interior residential, commercial, and maintenance applications. PRO-JEX ZERO can be used on drywall, plaster, masonry, metal, wood, and hardboard.

- **Even Finish**
- **Good Touch Up**
- **Ultra-Low VOC** (*<2 g/L per ASTM 6886)
- **Flat, Low Sheen, Eggshell, Satin, and Semigloss Sheens available**



For more application and safety information see Technical and Safety Data Sheets

	FLAT	LOW SHEEN	EGGSHELL	SATIN	SEMIGLOSS
VOLUME SOLIDS	31 ± 2%	33 ± 2%	32 ± 2%	31 ± 2%	30 ± 2%
WEIGHT PER GALLON	11.8 ± .25 lbs.	10.2 ± .25 lbs.	10.1 ± .25 lbs.	10.0 ± .25 lbs.	9.7 ± .25 lbs.
GLOSS	< 5 @ 60°	5 - 10 @ 60°	10 - 20 @ 60°	20 - 35 @ 60°	40 - 55 @ 60°
VOC (ASTM 6886)	<2 g/L	<2 g/L	<2 g/L	<2 g/L	<2 g/L
COVERAGE	250-400 ft ² /G	250-400 ft ² /G	250-400 ft ² /G	250-400 ft ² /G	250-400 ft ² /G
DRY TIME	2 - 4 Hours	2 - 4 Hours	2 - 4 Hours	2 - 4 Hours	2 - 4 Hours
TEMPERATURE	50°F - 100°F	50°F - 100°F	50°F - 100°F	50°F - 100°F	50°F - 100°F